


# MCP1A

## Conventional Marine Approved Manual Call Point

### Features

- ▶ Complies with EN54-11
- ▶ Push-fit terminals can accommodate up to a 2.5mm<sup>2</sup> solid conductor
- ▶ Unique 'Plug & Play' installation concept
- ▶ Re-settable operating element option
- ▶ Resistive and clean contact connections
- ▶ Semi-flush or surface mounting
- ▶ Backward compatibility
- ▶ Other colours available
- ▶ Approved by GL

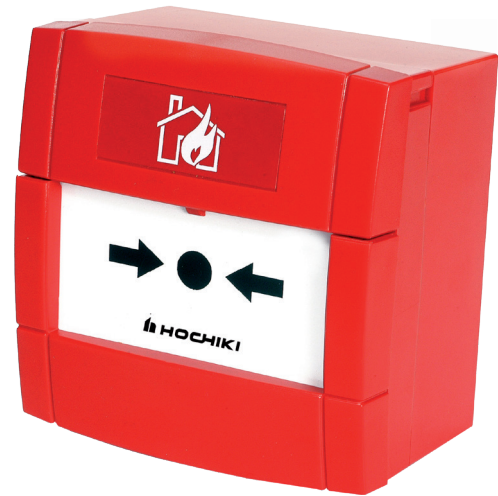

### Description

The MCP1A is a Conventional Marine Approved call-point based upon the industry standard KAC world series housing and features easy to install, push-fit wiring terminals. The unit features a 'Non Frangible Plastic' element.

### Specification

Nominal operating resistance	470Ω
Maximum contact resistance (R)	200Ω
Ingress Protection Rating	IP24
Operating Temperature Range	-25°C to + 70°C
Storage Temperature Range	-30°C to + 70°C
Maximum Humidity	95%RH - Non condensing (at 40°C)
Colour / Case Material	Red / ABS
Weight (g) / Dimensions (mm)	(Flush Mount) 110 / W89 x H93 x D27.5
	(Surface Mount with Back Box) 161 / W89 x H93 x D59.5
Approvals	DNV-GL

### Ordering Codes

#### Product

Conventional Marine Approved Manual Call Point  
Non-Frangible Element

#### Part Number

MCP1A  
KAC/EWS/HE

### Approvals

