


TORNILLO HEXAGONAL DIN 931 6.8 ZINCADO



CARACTERÍSTICAS

- El tornillo DIN 931 es un tornillo de cabeza hexagonal y sin huella.
- El cuerpo es cilíndrico de media rosca. Termina en chaflán, es decir, plana
- Acero Clase 6.8.
- Se utiliza para la unión de piezas con un gran apretado.

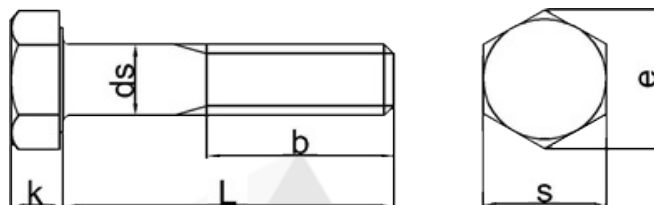

Medida	b			s		e	k		ds	
	(1)	(2)	(3)	min	max	min	min	max	min	max
M7	20	26	-	10.73	11	12.12	4.65	4.95	6.78	7
M8	22	28	-	12.73	13	14.38	5.15	5.45	7.78	8
M10	26	32	45	16.73	17	18.9	6.22	6.58	9.78	10
M12	30	36	49	18.67	19	21.1	7.32	7.68	11.73	12
M14	34	40	53	21.67	22	24.49	8.62	8.98	13.73	14
M16	38	44	57	23.67	24	26.75	9.82	10.18	15.73	16
M18	42	48	61	26.67	27	30.14	11.28	11.72	17.73	18
M20	46	52	65	29.67	30	33.53	12.28	12.72	19.67	20
M22	50	56	69	31.61	32	35.72	13.78	14.22	21.67	22
M24	54	60	73	35.38	36	39.98	14.78	15.22	23.67	24
M27	60	66	79	40	41	45.2	16.65	17.35	26.48	27
M30	66	72	85	45	46	50.85	18.28	19.12	29.48	30

(1) $L \leq 125\text{mm}$.

(2) $125 < L \leq 200\text{mm}$.

(3) $L > 200\text{mm}$.

REF: CP9316M_042021_REV0

AQL PROTECCION

Carretera N-340 Km 1245, 3 Nave B-5 Polígono industrial El Pla 08750 Molins de Rei, Barcelona (España)
Tel. (+34) 936800376 * WhatsApp pedidos: 660781482 * www.aqlproteccion.com * aql@aqlproteccion.com

ANBER

Avda. de las Flores, 13-15 P.E. El Molino 28970 Humanes de Madrid, Madrid (España)
Tel. (+34) 916063711 * WhatsApp pedidos: 649787619 * www.anber.es * anber@anber.es